
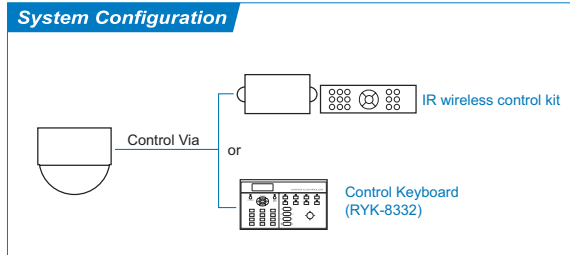


Mini Pan/Tilt Dome Camera

Features

- Auto travel function
- Support 6 preset groups (up to 16 preset points)
- Remote control via RS-485 interface
- Built-in 1 alarm input
- Using IR wireless control kit can control up to 9 devices, Using control keyboard can control up to 15 devices

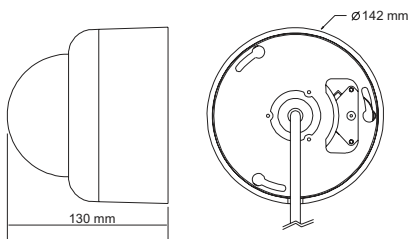

| Model No. | RYK-2E49 | RYK-2E85 |
|----------------------|------------------------------------------------------|----------------------------------------------|
| Image Device | 1/3" Color Sony Super HAD | 1/3" Color Sony Super HAD (HI-Res.) |
| Picture Elements | NTSC:510x492, PAL:500x582 | NTSC:768x494, PAL:752x582 |
| Resolution | 380 TVL | 470 TVL |
| Min. Illumination | 0.2 Lux / F2.0 | 0.3 Lux / F2.0 |
| Electronic Shutter | NTSC:1/60~1/100,000, PAL:1/50~1/110,000 | |
| Lens | Board Lens 3.6mm / F2.0 (option:2.5/4.3/6/8/12/16mm) | |
| White Balance | Auto | |
| Gain Control | Auto | |
| Back Light Comp. | Yes | |
| Pan / Tilt Control | Angle | Pan 0°~340°, Tilt: 0°~80° |
| | Speed | Manual: Pan 1°~150°/ sec, Tilt: 1°~100°/ sec |
| | Control | Auto: Pan 1°~300° / sec, Tilt: 1°~200° / sec |
| Alarm Input | Adjustable N.C. / N.O. property via dip-switch | |
| Controller Interface | RS-485 | |
| Remote Control | IR wireless control Kit (option: Control Keyboard) | |
| Preset Point | 16 preset points | |
| Control Command | PELCO D&P protocol | |
| Sync. System | Internal | |
| Video Output | 1 Vp-p / 75 Ohms | |
| Power Supply | DC12V ± 10% | |
| Power Consumption | 1000mA max. | |
| Operating Temp. | -10°C ~ 40°C | |