


IR Space Dome Camera



Features

- Sony Super HAD CCD sensor
- Built-in 24 pieces IR-LED
- Effective range up to 20M

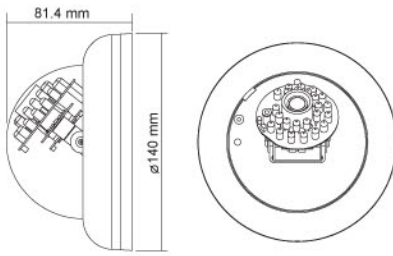

Option :



RYK-8719-3
L Type Bracket

| Model No. | RYK-2G49L | RYK-2G85L | RYK-3G41L | RYK-3G43L |
|---------------------|---|---|---|---|
| Image Device | 1/3" Color Sony Super HAD | 1/3" Color Sony Super HAD (Hi-Res.) | 1/3" B/W Sony Super HAD | 1/3" B/W Sony Super HAD (Hi-Res.) |
| Picture Elements | NTSC:510x492, PAL:500x582 | NTSC:768x494, PAL:752x582 | EIA:510x492, CCIR:500x582 | EIA:768x494, CCIR:752x582 |
| Resolution | 380 TVL | 470 TVL | 420 TVL | 600 TVL |
| Min. Illumination | 0.2 Lux / F2.0 (Day), 0 Lux (IR On) | 0.3 Lux / F2.0 (Day), 0 Lux (IR On) | 0.1 Lux / F2.0 (Day), 0 Lux (IR On) | 0.2 Lux / F2.0 (Day), 0 Lux (IR On) |
| S/N Ratio | More than 48dB | | | |
| Electronic Shutter | NTSC:1/60~1/100,000, PAL:1/50~1/110,000 | | EIA:1/60~1/100,000, CCIR:1/50~1/110,000 | |
| Gamma | 0.45 | | | |
| Lens Furnished | Board Lens 3.6mm / F2.0 (option:4.3/6/8/12mm) | | | |
| White Balance | Auto | | - | |
| Gain Control | Auto | | | |
| Sync. System | Internal | | | |
| Video Output | 1 Vp-p / 75 Ohms | | | |
| Infrared Luminary | 24 pieces IR-LED | | | |
| Wavelength | 850 nm | | | |
| Illuminate Distance | 20 M | | | |
| Power Supply | DC12V±10% | | | |
| Power Consumption | IR On: 400mA max. IR Off: 120mA max. | IR On: 420mA max. IR Off: 200mA max. | IR On: 375mA max. IR Off: 110mA max. | IR On: 375mA max. IR Off: 120mA max. |
| Operating Temp. | -10°C ~ 50°C | | | |