

3-DNR HAWK VANDAL PROOF DOME CAMERA

Features

- 1/3" New Color Sony High Sensitivity CCD
- 600TVLines
- Provide Various Functions By OSD Menu
- 3-DNR/ D-WDR/ HSBLC
- Built-In Filter Changeable (ICR)- (Option)
- UTP (Option)
- 12VDC and Dual Voltage (Option)
- IP 66 Weatherproof

Technical Specifications

Image Sensor -----	1/3" New High Sensitivity Sony CCD
Horizontal Resolution -----	600TVLines at center (B/W Mode:700TVLines)
Min.Illumination -----	0.1Lux.(f=1.2). 0.00019Lux/ Sens-up X256 B/W Mode: 0.01Lux. (f=1.2)
Synchronizing System -----	Internal/ Line-Lock
Video output -----	1.0Vp-p Composit 75ohm
Scanning System -----	2:1 Interlace
S/N Ratio -----	More than 50dB
Smear Effect -----	0.005%
Gamma Correction -----	r=0.45
White Balance -----	AUTO(2100°K~9100°K)
Lens -----	2.8~11mm Varifocal DC Auto IRIS Lens
External Control -----	OSD 12VDC, 130Ma
Power Source -----	12VDC&24VAC DUAL (option)
Operation Temp. -----	-20°C~ 60°C
Weight -----	900g
Measurement -----	145(Ø) X 103(H)mm




Special OSD Functions

LENS -----	DC/MANUAL (Selectable)
AGC -----	OFF/ON (Level Adjustable)
Sens-Up -----	OFF/ON (X2 ~X256)
BLC -----	OFF/ON (8 Zone Selectable)
HSBLC -----	OFF/ON (Zone Selectable)
D-WDR -----	OFF/INDOOR/OUTDOOR
White Balance -----	ATW/ AWB/ AWC/ MANUAL INDOOR/OUTDOOR (Selectable)
Day & Night -----	Auto/ B.W/ Color/EXT (Selectable)
3DNR -----	OFF/ON (Level Adjustable)
ADJUST -----	Sharpness/Blue/Red (Level Adjustable)
Camera ID -----	OFF/ON (Selectable)
Motion Detection -----	OFF/ON (Level Adjustable)
Privacy Masking -----	OFF/ON (8 Area Selectable)
Digital Zoom -----	OFF/ON (X2 ~ X32)
Mirror -----	OFF/ON (Selectable)
Gamma Correction -----	User/0.05~1.00 (Selectable)
Communication -----	RS-485 (Option)
Protocol -----	Pelco-D

High Resolution (600TVLines)

NTSC	
Effective Pixels -----	768(H)X494(V) pixels
Scanning -----	525Lines, 60 fields, 30 frames
Horizontal -----	15.734 Khz
Vertical -----	59.94 Hz
Electronic Shutter -----	1/60-1/100,000


PAL	
Effective Pixels -----	752(H)X582(V) pixels
Scanning -----	625Lines, 50 fields, 25 frames
Horizontal -----	15.625 Khz
Vertical -----	50 Hz
Electronic Shutter -----	1/50-1/100,000

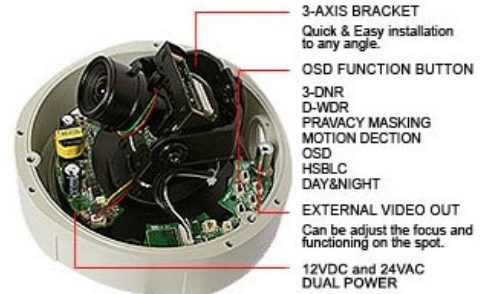


Provide high sensitivity color presentation in backlighted conditions.



HSBLC
Mask excessive backlight to be dark and objects to watch look more clearly.

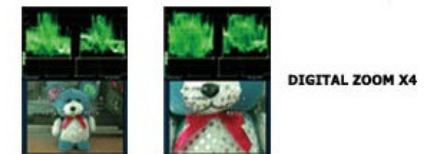

DIGITAL ZOOM X4

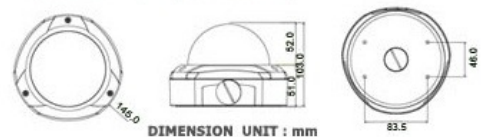

DIMENSION UNIT : mm