


• Side View

• Top View

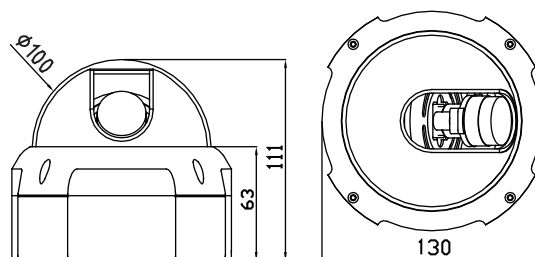

FEATURES

- ▶ H.264 Compression capability
- ▶ DC 2.8 ~ 11mm
- ▶ High picture quality 1/3" Super - HAD CCD
- ▶ High sensitivity 0.002 lux
- ▶ Camera OSD control
- ▶ Super Day / Night Function with Power Sensor-up engine
- ▶ Super DNR / Rugged Design with IP 66
- ▶ 3 - Axis Bracket : Pan 360 Tilt 90 Turn 360
- ▶ Vandal Proof Dome Case / Ceiling / Wall Mounting Available
- ▶ High - frame rate of up to 30fps at 740 x 480 (NTSC)
/ 740 x 576 (PAL) size image
- ▶ 4 selectable image sizes - D1, Half D1, 2 CIF, CIF
- ▶ Simultaneous access up to 20 users
- ▶ Intelligent Motion detection and alarm trigger function
- ▶ Access priority setting capability
- ▶ 2Way - Audio
- ▶ Option - ICR (IR filter cut removeable)
PoE (Power over Ethernet)

SPECIFICATIONS

DESCRIPTION - [IMAGING]

- ▶ Image Sensor 1/3" Sony Super - HAD CCD, 410,000 pixels
- ▶ Total Pixel NTSC : 811(H)x 508(V) / PAL - 795(H)x 592 (V)
- ▶ Horizontal resolution 540 TV Lines
- ▶ Minimum Illumination 0.002 Lux (Sense - up X 128)
- ▶ S/N Ratio 50dB (Weight On)
- ▶ Lens DC Auto Iris Vari - Focal D/N , f = 2.8 ~ 11 mm
(Option : DC Auto Iris Vari - Focal D/N , f = 3 ~ 9 mm)
- ▶ Aperture Ratio 1.4 ~ 360
- ▶ Angle of View H : 96.7' ~ 24.1' , V : 71.2' ~ 18.2' , D : 124.3' ~ 30.2'
- ▶ Scanning System 2 : 1 interlaced
- ▶ Synchronization H.264
- ▶ Electric Shutter Speed 1/60 - 1 / 200,000 sec

DESCRIPTION - [CONTROL]

- ▶ Auto D/N Yes
- ▶ On Screen Display (O. S. D) Built - in
- ▶ Privacy Function ON / OFF (4 Programmable Zone)
- ▶ View Program Web View @ PC Yes
CMS @ PC Yes
- ▶ Network Global / Private / Static / Dynamic IP Yes
DDNS Support Yes
Interface 10/100Mbps
- ▶ Concurrent Users 20

- ▶ Recording @ PC Manual Yes
Schedule Yes
Motion Detection Yes
Sensor Event Yes
- ▶ Event & Alarm Sensor Trigger / Motion Detection Yes
Alarm Notification Alarm Sound

DESCRIPTION - [PHYSICAL]

- ▶ Audio Bi - Directional Yes
Compression G.711
- ▶ Video Output 1.0 vp - p 75 ohm Composite
- ▶ Power Source DC 12V (PoE : Option)
- ▶ Operational Temperature -10 deg ~ +50 deg C RH 95% MAX (14 deg F to 122 deg F)
- ▶ Power Consumption (Max) IP - D7600SR IP - C4300SR
7W 3.6W
- ▶ Dimension 130φ (D) * 111mm (H) 55.4mm(H) * 64mm (W) * 120mm (L)
- ▶ Weight 1.2Kg 0.7Kg

DESCRIPTION - [CONNECTIVITY]

- ▶ Video Out 1
- ▶ Audio In/Out 1/1
- ▶ Sensor In / Relay Out 1/1
- ▶ Ethernet Jack RJ45 (10Base - T / 100 Base - TX)
- ▶ Protocols HTTP , FTP , TCP , IP , DHCP , ICMP , NTP , DNS , DDNS