



SUPER RESOLUTION BOX IP CAMERA

IP - Information provider camera

• FRONT VIEW



• SIDE VIEW

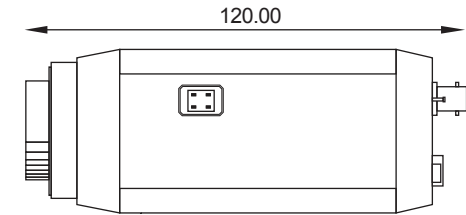

FEATURES

- ▶ MPEG4, JPEG Dual Codec Compression capability
- ▶ MPEG4, JPEG Tripple stream capability
- ▶ C / CS Lens mountable
- ▶ High picture quality 1/3" Super - HAD CCD
- ▶ High sensitivity 0.002 lux
- ▶ Camera OSD control
- ▶ Super Day / Night Function with Power Sensor-up engine
- ▶ Super DNR / Privacy Mask
- ▶ Single-Body type Bracket Stand
- ▶ High - frame rate of up to 30fps at 740 x 480 (NTSC)
/ 740 x 576 (PAL) size image
- ▶ 4 selectable image sizes - D1, Half D1, 2 CIF, CIF
- ▶ Simultaneous access up to 20 users
- ▶ Intelligent Motion detection and alarm trigger function
- ▶ Pre-alarm recoding
- ▶ Networking security : password protection & Encryption
- ▶ Access priority setting capability
- ▶ Analog composite video output for local analog viewing or recoding
- ▶ Supports NVR@PC, Viewer@PDA, Mobile Phone

SPECIFICATIONS

DESCRIPTION - [IMAGING]

- ▶ Image Sensor
- ▶ Total Pixel
- ▶ Horizontal resolution
- ▶ Minimum illumination
- ▶ S/N Ratio
- ▶ Lens
- ▶ Scanning System
- ▶ Synchronization
- ▶ Compression
- ▶ Electric Shutter Speed
- ▶ Multiple Streaming
- ▶ Max. Frame Rate
- ▶ Frame Rate
- ▶ Auto D/N
- ▶ On Screen Display (O.S.D)

IP - C4000SR

1/3" Sony SuperHAD CCD, 410K
 NTSC : 811(H)x 508 (V) / PAL : 795(H)x 592(V)
 540 TV Lines
 0.002 Lux (Sens-up 128X)
 50dB (Weight On)
 C / CS Mount Lens selectable
 2:1 Interlaced
 Internal
 MPEG4 / JPEG
 NTSC: 1/60-1 / 100,000 PAL: 1/50-1 / 100,000
 MPEG4 (2ch) / JPEG (1ch)
 NTSC: 30, 15, 10, 7, 6, 5, 4, 3, 2, 1 fps (10 Steps)
 PAL: 25, 12, 8, 7, 6, 5, 4, 3, 2, 1 fps (10 Steps)
 Yes
 Built-in

DESCRIPTION - [CONTROL]

- ▶ Privacy Function
- ▶ Viewer Program
- ▶ Network
- ▶ Concurrent Users
- ▶ Event & Alarm

IP - C4000SR

ON / OFF (4 Program able Zone)
 Web Viewer / PDA Viewer / NVR@PC / Viewer@ Mobile Phone Yes
 Global / Pravate / Static / Dynamic IP / DDNS Support Yes
 Encryption (ID / PW / image) Yes
 Interface - 10 / 100 Mbps
 20
 Sensor Trigger / Motion Detection Yes
 Alarm Notification SMS / E-Mail / Alarm Sound (Option)

DESCRIPTION - [PHYSICAL]

- ▶ Video Output
- ▶ Dimension
- ▶ Power Source
- ▶ Power Consumption (Max)
- ▶ Operational Temperature
- ▶ Weight

IP - C4000SR

1.0vp - p75 ohm Composite
 56.00mm (W) * 64.00mm (H) * 120.00 mm (D)
 DC 12V
 6W
 -10 deg - +50 deg C RH 95% MAX (14 deg F to 122 deg F)
 0.6 Kg

DESCRIPTION - [CONNECTIVITY]

- ▶ Video Out
- ▶ Sensor In / Relay Out
- ▶ Ethernet Jack
- ▶ Protocols

IP - C4000SR

1
 Option
 RJ45 (10Base - T / 100 Base - TX)
 HTTP, FTP, SMTP, TCP, IP, DHCP, ICMP, NTP, DNS, DDNS