

MINI VANDAL PROOF DOME CAMERA



SURFACE MOUNT TYPE

Features

- 1/3" Color Sony Super HAD CCD II
- 600TVLines/ 700TVLines (B/W Mode)
- Provide Various Functions By OSD Menu and High Quality Image.
- Sens-UP/ 3-DNR/ HSBL/ Privacy Masking/ Motion Detection
- Built-In Filter Changeable (ICR)- (Option)
- UTP available (Option) ATU
- 12VDC & 24VAC Dual Power
- Wall or Ceiling Mounting through the 3-Axis Camera Bracket
- Surface, Flush or Angle Mounting available
- IP 67, Aluminum Diecasting Vandal Proof Dome Camera.

MOUNT BRACKET






FLUSH MOUNT TYPE




ANGLE MOUNT TYPE

DIMENSION

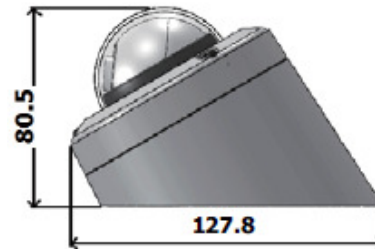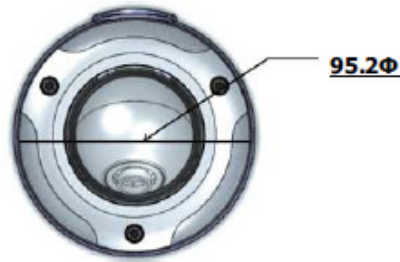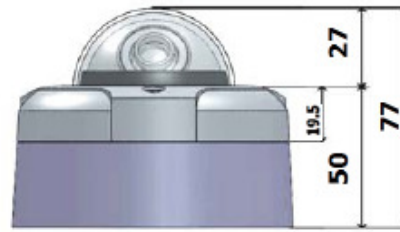

CONFIGURATION & CONTROL BOARD

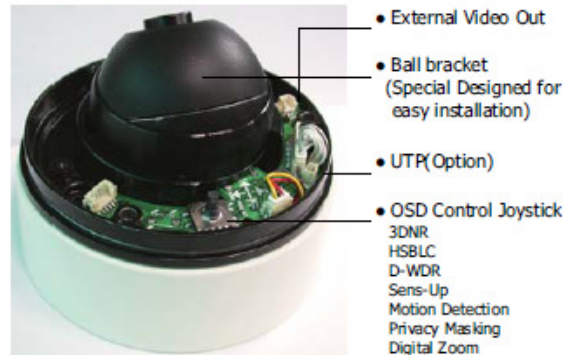

Technical Specifications

Image Sensor -----	1/3" Color Sony Super HAD CCD II
Horizontal Resolution -----	600TVLines at center (B/W Mode : 700TVLines)
Min. Illumination -----	0.1Lux.(f=1.2). 0.00019Lux/ Sens-up X256 B/W Mode: 0.01Lux. (f=1.2)
Synchronizing System ---	Internal
Video output -----	1.0Vp-p Composit 75ohm
Scanning System -----	2:1 Interlace
S/N Ratio -----	More than 50dB
Smear Effect -----	0.005%
Gamma Correction -----	r=0.45
White Balance -----	AUTO(2100°K~9100°K)
Lens -----	3.6mm Fixed Lens
External Control -----	OSD
Power Source -----	12VDC/ 90mA., Dual 120mA
Operation Temp. -----	-20°C~ 60°C
Weight -----	400g
Measurement -----	95.2(Ø) X 77(H)mm

Special OSD Functions

AGC -----	OFF/ON (Level Adjustable)
Sens-Up -----	OFF/ON (X2 ~X256)
BLC -----	OFF/ON (8 Zone Selectable)
-----	-----
HSBL -----	OFF/ON (Zone Selectable)
D-WDR -----	OFF/INDOOR/OUTDOOR
White Balance -----	ATW/ AWB/ AWC/ MANUAL INDOOR/OUTDOOR (Selectable)
Day & Night -----	Auto/ B.W/ Color/EXT (Selectable)
3DNR -----	OFF/ON (Level Adjustable)
ADJUST -----	Sharpness/Blue/Red (Level Adjustable)
Camera ID -----	OFF/ON (Selectable)
Motion Detection -----	OFF/ON (Level Adjustable)
Privacy Masking -----	OFF/ON (8 Area Selectable)
Digital Zoom -----	OFF/ON (X2 ~ X32)
Mirror -----	OFF/ON (Selectable)
Gamma Correction -----	User/0.05~1.00 (Selectable)

NTSC

Effective Pixels -----	768(H)X494(V) pixels
Scanning -----	525Lines, 60 fields, 30 frames
Horizontal -----	15.734 Khz
Vertical -----	59.94 Hz
Electronic Shutter -----	1/60-1/100,000

PAL

Effective Pixels -----	752(H)X582(V) pixels
Scanning -----	625Lines, 50 fields, 25 frames
Horizontal -----	15.625 Khz
Vertical -----	50 Hz
Electronic Shutter -----	1/50-1/100,000